

ASKIN ROOFING ORDER FORM



Performance Panels

Date Ordered	Delivery / Pick Up
--------------	--------------------

Delivery / Pick Up Date	Delivery Address
-------------------------	------------------






Name			Purchase Order Number		
Company			Project Number		
Address			Project Sales Order Number		
Suburb	State	Postcode	Site Address		
Phone			Suburb	State	Postcode
Fax			Delivery Site Contact Name		
Email			Contact Phone Number		

ROOFING PANEL SYSTEM:

Please fill in the below table

	Skin Substrate	Skin Thickness (mm)	Skin Profile	Skin Colour
External				
Internal				

	Panel Type 1	Panel Type 2	Panel Type 3	Panel Type 4	Panel Type 5	Panel Type 6
Quantity						
Length (mm)						
Core Type						
Panel Thickness (mm)						
Panel Length 'A'(mm)						
Panel Cut back 'B'(mm)						
Panel Cut back 'C'(mm) (If Required)						
Lay Direction (Right Hand or Left Hand)						

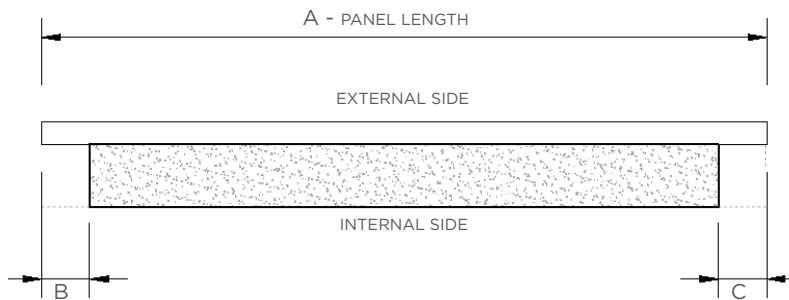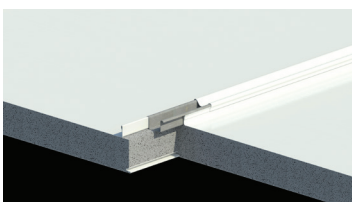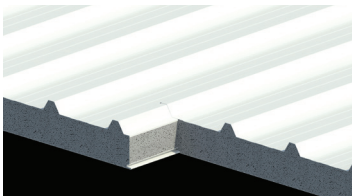

SPECIAL INSTRUCTIONS - Please state specific packing instructions, delivery or handling requirements, site accessibility and any other comments.

ASKIN ROOFING ORDER AGREEMENT

Signing this agreement acknowledges you accept responsibility and the information provided is true and correct.

Print Name: _____ **Signature:** _____ **Date:** _____

NOTES

- Steel substrate/thickness:** 0.5mm AM100 is standard external skin, 0.4mm Z275 is standard internal skin.
Colours: Please contact your local ASKIN representative to advise availability and MOQ of standard colour options. Standard internal skin is off white with a flat profile.
- Core Material:** Core options are XFLAM (FM approved) and EPS-FR (flame retardant expanded polystyrene)
Panel Thickness: Optional thickness from 50mm to 250mm in multiples of 25mm are available.
Cutbacks: Standard cutback is 75mm, standard lap is 200mm other options are available in multiples of 25mm.
Packaging: Standard packaging is Rib to Rib. Other options available at an additional cost.
Please contact your local ASKIN Sales Representative for further information.



Offices Australia wide
www.askin.net.au

ROOFING PANEL SYSTEM:

Please fill in the below table

	Skin Substrate	Skin Thickness (mm)	Skin Profile	Skin Colour
External				
Internal				

	Panel Type 7	Panel Type 8	Panel Type 9	Panel Type 10	Panel Type 11	Panel Type 12
Quantity						
Length (mm)						
Core Type						
Panel Thickness (mm)						
Panel Length 'A'(mm)						
Panel Cut back 'B'(mm)						
Panel Cut back 'C'(mm) (If Required)						
Lay Direction (Right Hand or Left Hand)						

ROOFING PANEL SYSTEM:

Please fill in the below table

	Skin Substrate	Skin Thickness (mm)	Skin Profile	Skin Colour
External				
Internal				

	Panel Type 13	Panel Type 14	Panel Type 15	Panel Type 16	Panel Type 17	Panel Type 18
Quantity						
Length (mm)						
Core Type						
Panel Thickness (mm)						
Panel Length 'A'(mm)						
Panel Cut back 'B'(mm)						
Panel Cut back 'C'(mm) (If Required)						
Lay Direction (Right Hand or Left Hand)						

SPECIAL INSTRUCTIONS

Please state specific packing instructions, delivery or handling requirements, site accessibility and any other comments.

