

Product Specification Sheet

External Walls & Facades

ViviD

XFLAM



HARD FACTS

Project:
The Bend Motor Sport Park

Architect:
ADS Architects

Profile:
Silkline

Skins:
Colorbond Woodland Grey & Night Sky

XFLAM Core

ASKIN XFLAM is a patented Australian made material that is made from a syntactic phenolic foam that meets and exceeds all the performance requirements for rigid insulated material. XFLAM External Wall systems have been tested for thermal performance, weatherproofing, fire and wind loadings.

XFLAM Panel is a Group 1 material that meets the Factory Mutual requirements for internal, external, and roofing applications. XFLAM has achieved FM 4882 that certifies the insulated panels for smoke sensitive occupancies.

Thermal Performance

PRODUCT MATERIAL PROPERTIES					TOTAL SYSTEM R-VALUES	
Panel Nominal Thickness (mm)	Product U-Value (W/m ² K) at 23°C	Product R-Value (m ² K/W) at 23°C	Product R-Value (m ² K/W) at 15°C	Product R-Value (m ² K/W) at 0°C	Heat Flow Out (Winter)	Heat Flow In (Summer)
50	0.71	1.40	1.40	1.50	1.60	1.50
75	0.45	2.05	2.10	2.20	2.30	2.10
100	0.34	2.75	2.80	2.95	3.00	2.80
125	0.29	3.45	3.50	3.70	3.70	3.50
150	0.24	4.15	4.25	4.45	4.40	4.20
175	0.21	4.85	4.95	5.20	5.10	4.90
200	0.18	5.55	5.65	5.95	5.80	5.50
250	0.14	6.90	7.05	7.40	7.20	6.90

Total R-Values for the building element as required by the Energy Provisions of the National Construction Code, calculated in accordance with AS/ NZS 4859.2:2018. ASKIN Volcore is manufactured, tested and packaged in conformance with AS/NZS 4859.1:2018

Declared Product R-Value is calculated in accordance with AS/NZS 4859.1:2018 as required for compliance to the National Construction Code 2019.

Features & Benefits

- ▲ Clean architectural finish
- ▲ Lengths available up to 13.8m
- ▲ Warranties up to 15 years
- ▲ FM Approved
- ▲ Fast to install
- ▲ Concealed (secret) fixing
- ▲ Extremely thermally efficient (Product R-Values up to 6.9)
- ▲ Designer Range of Colours
- ▲ Architectural low, medium and high profiled ribs available

XFLAM ViviD meet and exceed all the requirements of the National Construction Code with NATA approved testing and approvals. XFLAM Panel is a Factory Mutual (FM Approved) product meeting the rigorous international guidelines for fire compliance. XFLAM is a multi-layered product thus needs to satisfy the ISO AS 9705 2003 Room test as stipulated in AS 5637.

XFLAM ViviD has met the performance requirements of weatherproofing by tested to AS4284:2008, as required by the verification method NCC 2019 FV1.1.

ASKIN Panel achieves the following ratings for panel tested in accordance with AS 1191-2002 and assessed against AS/NZS ISO 717.1: 2004

Fire Performance

CRITERIA	PERFORMANCE
AS 1530.3: 1999 (Test for Flammability of materials)	Flame Spread 0 Smoke Dev. 2 Heat Evolved 0 Ignition 0
AS 5637.1: 2015 Compliance to C1.10 AS ISO 9705: 2003 (R 2016)	Group 1, SMOGRA < 100 (m ² / s ² x 1000)
Factory Mutual (FM Global) Approval	FM 4880 - Unlimited Height FM 4881 - Exterior wall systems FM 4882 - Smoke Sensitive Occupancies

Weather Proofing

CRITERIA	PERFORMANCE
AS 4284: 2008 Water Ingress Test	NCC Compliant to FP1.4 and FP1.5 as per FV1.1

Acoustics

CRITERIA	RW	RW + CTR
ASKIN XFLAM Panel 75mm	25	23

Physical Properties

CRITERIA	PERFORMANCE
Core Density	36 +/- 4 kg/m ³
Recyclable	100% Recyclable
Workability	Excellent. No requirement for protection

Manufacturing Tolerances

CRITERIA	MANUFACTURED	TOLERANCE
Length	2,000mm to 22,000mm	+/- 5mm
Width	Standard as 1,200mm	+/- 1mm
Thicknesses	50mm to 250mm in multiples of 25mm	+/- 1mm

Installation Tolerances

PANEL LENGTH	INSTALLATION TOLERANCE
0mm to 4,000mm	+2 / -1mm
+4,000mm	+3 / -1mm
Panel Joints	+2 / -2mm

* ASKIN recommend the use of clamps for ensuring minimum variable tolerance.

Though predominantly installed vertically, ASKIN Performance Panels can also be installed horizontally or diagonally for aesthetic or practical reasons. Long panels or panels passing structural elements can be butt jointed with negative detail top hat sections. These can be supplied with fixing concealing caps. ASKIN Performance Panels can be fastened with a range of hardware available from ASKIN, including hidden fixings, Tek screws, mushroom head threaded rods, dome nut bolts, coach screws, suspension brackets and spring fixings. Please contact your ASKIN representative for more information.

Colour Range

A full range of colours are available depending on Minimum Order Quantities and warranties. Please contact your ASKIN representative as each project needs clarification on Solar Absorbance as stated in the NCC.

Environment

Resource Efficiency


As a low density insulation product XFLAM uses very little natural resources by volume to manufacture. This, coupled with the high insulation performance, mean that the energy savings from using XFLAM will amount to hundreds of times the energy required to produce the product.

Zero ODP

XFLAM foam insulation manufacturing does not use Ozone Depleting Substances such as CFCs, HCFCs or HFCs.

External Wall & Facade Profile Combination

EXTERNAL PROFILES

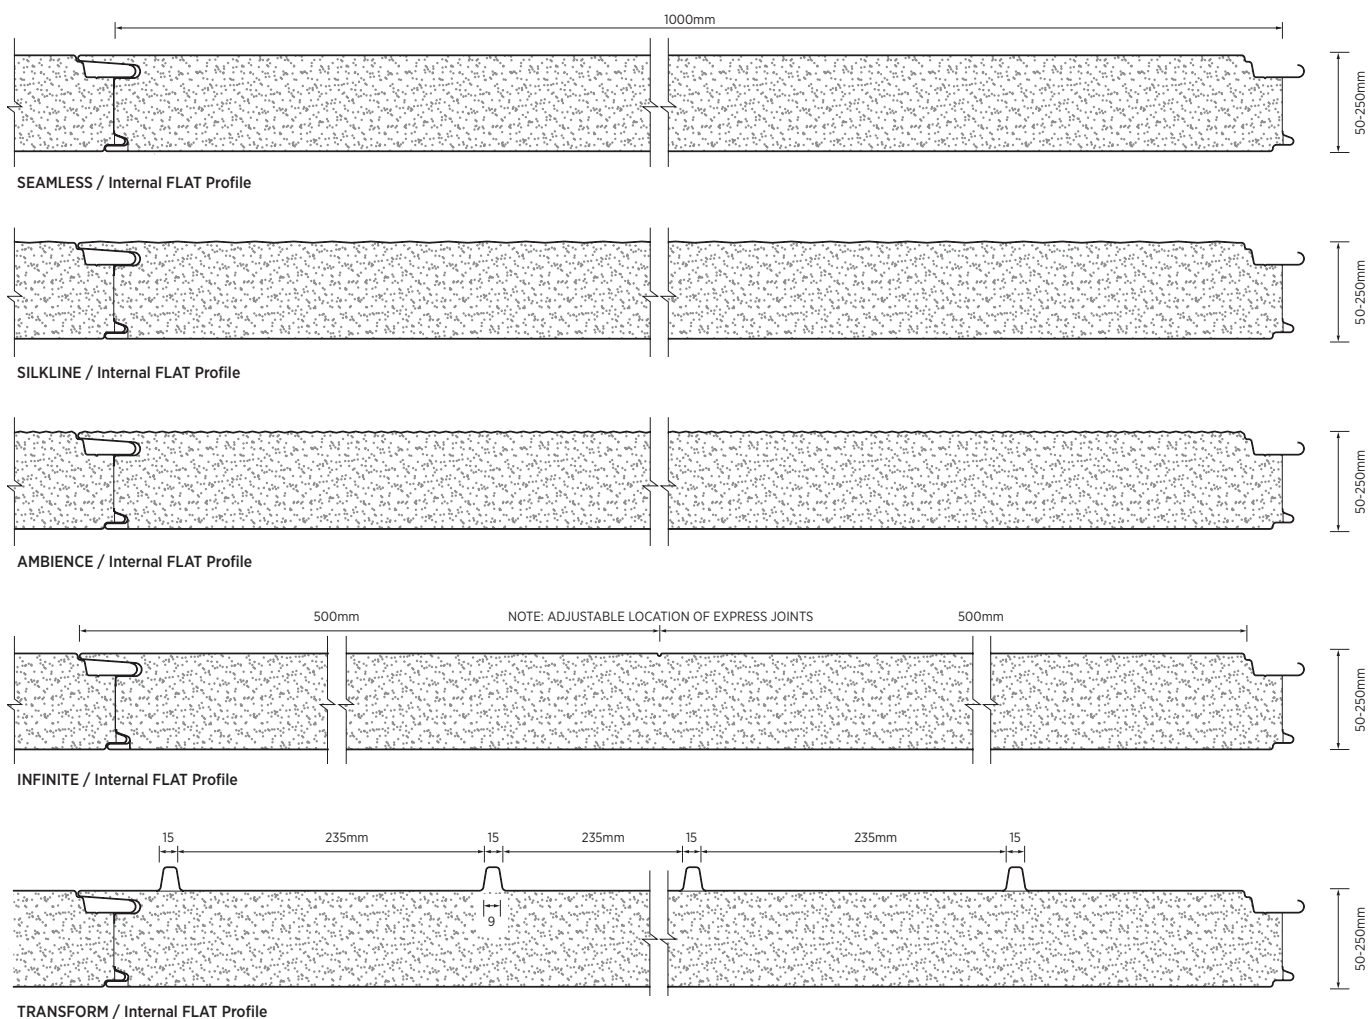

0.6mm (or 0.7mm) External Face Skin with 0.6mm Internal Face Skin

Standard Steel Specification

EXTERNAL SKIN MATERIAL – 0.6 or 0.7mm Thick G300S AM100 high performance steel with pre-painted superior polyester finish coat of 25 microns.

INTERNAL SKIN MATERIAL – 0.6mm Thick G300S Z275 pre-painted Colorbond® Intramax® steel with superior polyester finish coat of 25 microns. Colorbond® Intramax® steel is specifically designed for temperature controlled environments.

Panel Weight (m²)

PANEL THICKNESS (mm)	50	75	85	100	125	150
Weight (kg / m ²) for 0.6 / 0.6	12.1	13.0	13.3	13.8	14.5	15.5
Weight (kg / m ²) for 0.7 / 0.6	13.0	13.9	14.1	14.7	15.4	16.4

AS/NZS 2728 Paint Coating. AS 1397 Substrate System

Span Table: ULS Allowable Pressure (kPa)

PANEL	PANEL SPAN (m)								
THICKNESS (mm)	2.0m	2.4m	3.0m	3.6m	4.0m	5.0m	6.0m	7.0m	8.0m
50mm	2.34	2.08	1.69	1.30	1.04	0.85	0.65	0.45	0.25
75mm	2.73	2.43	1.97	1.52	1.22	1.00	0.78	0.56	0.35
85mm	2.88	2.56	2.09	1.61	1.29	1.06	0.84	0.61	0.38
100mm	3.11	2.77	2.25	1.74	1.40	1.16	0.92	0.68	0.44

Span Table: SLS Allowable Pressure applied Externally (kPa)

PANEL	PANEL SPAN (m)								
THICKNESS (mm)	2.0m	2.4m	3.0m	3.6m	4.0m	5.0m	6.0m	7.0m	8.0m
50mm	1.87	1.60	1.18	0.77	0.49	0.38	0.28	0.17	0.07
75mm	2.03	1.81	1.48	1.15	0.93	0.74	0.55	0.35	0.16
85mm	2.09	1.89	1.60	1.31	1.11	0.88	0.65	0.42	0.19
100mm	2.18	2.02	1.78	1.54	1.38	1.09	0.81	0.53	0.25

Span Table: SLS Allowable Pressure applied Internally (kPa)

PANEL	PANEL SPAN (m)								
THICKNESS (mm)	2.0m	2.4m	3.0m	3.6m	4.0m	5.0m	6.0m	7.0m	8.0m
50mm	-1.46	-1.31	-1.09	-0.87	-0.72	-0.6	-0.48	-0.36	-0.24
75mm	-1.46	-1.35	-1.18	-1.01	-0.89	-0.75	-0.61	-0.46	-0.32
85mm	-1.46	-1.36	-1.21	-1.06	-0.96	-0.81	-0.65	-0.50	-0.35
100mm	-1.47	-1.39	-1.27	-1.15	-1.07	-0.90	-0.73	-0.56	-0.39

Uniformly distributed ultimate limit state short term Wind load as derived from AS1170.2. Capacities derived from NATA approved structural testing in accordance with AS4040.2. Serviceability limit state deflection limited to span/150. Thermal deflection and required stress relief cuts should be considered for controlled environments by a suitably competent person. See ASKIN connection details for fire rated stress relief cuts.

Panel is assumed to be fixed from outside into a suitable structure inside. Fire rated walls and ceilings are non-load carrying and no permanent loads should be applied. Fixings, number and type should be considered by a suitably competent person. For FM approval requirements, please refer to specific test certificates available for download on our website. Loadings noted within span tables do not include the self-weight of the panel. Self weight will need to be applied when panel is used in a horizontal application (i.e. a roof or a ceiling).